
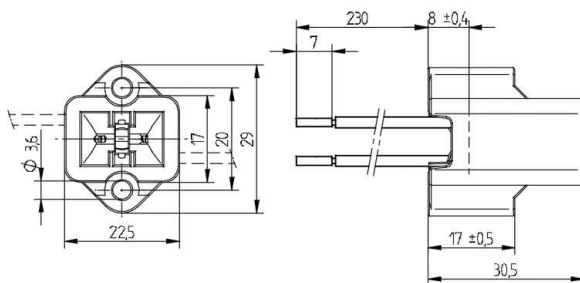


 Create pdf

## Lampholders for discharge lamps

25.722.3001

G8.5




colour	pkg.	wt.	part no.
other	144	26 g	25.722.3001.00

Wires: Cu, nickel plated 0.75 mm<sup>2</sup>, with ferrule,  
 Insulation: PTFE (max. 250 °C), transparent,  
 Free cable length: 230 mm

Screw fixing

Housing: Ceramic / PPS

- The correct function is obtained by screw fixing
- Suitable for light fittings of protection class II in accordance with EN 60598-1 2008.

T250	1 A 250 V	 5 kW/pulse
------	--------------	---

Document generated on: Th, 9. February 2017 - 17:23