



TALEXmodule STARK QLE G3 lens 270-1250 CLASSIC
TALEXmodule QLE


Product description

- Ideal for linear and panel lights
- Luminous flux range from 1,080 – 1,210 lm
- LED system solution with outstanding system efficacy up to 101 lm/W, consisting of squared LED modules and dimmable LED Driver LCAI 65W 150–400mA ECO Ip
- Efficacy of the module up to 118 lm/W
- High colour rendering index CRI > 80
- Small colour tolerance MacAdam 3[®]
- Small luminous flux tolerances
- Colour temperatures 3,000 and 4,000 K
- Perfectly uniform light, even if several LED modules are used together in a line
- Self cooling (no additional heat sink required)
- Push terminals for quick and simple wiring of LED module to LED module
- Simple installation (e.g. screws)
- Long life-time: 50,000 hours
- 5-year guarantee



Standards, page 3

Colour temperatures and tolerances, page 6

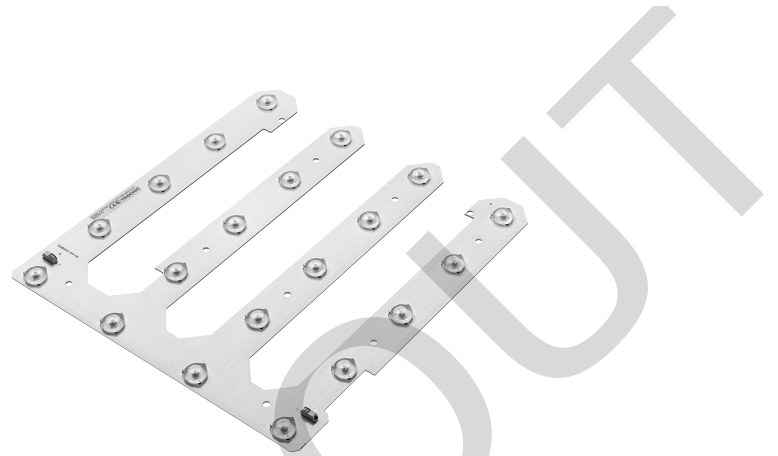




TALEXmodule STARK QLE G3 lens 270-1250 CLASSIC TALEXmodule QLE

Technical data

Beam characteristic	Butterfly
Ambient temperature range	-25 ... +55 °C
tp rated	45 °C
tc	85 °C
Max. DC forward current	360 mA
Max. permissible LF current ripple	396 mA
Max. permissible peak current	480 mA / max. 10 µs
Max. permissible output voltage of LED Driver ²⁾	500 V
Insulation test voltage	2 kV
ESD classification	severity level 4
Risk group (EN 62471:2008)	1
Type of protection	IP00

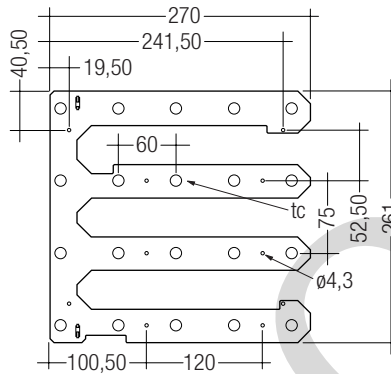

Ordering data

Type	Article number	Colour temperature	Packaging carton	Weight per pc.
TALEXmodule STARK-QLE-G3-LENS-270-1250-830-CLA	28000416	3,000 K	60 pc(s).	0.142 kg
TALEXmodule STARK-QLE-G3-LENS-270-1250-840-CLA	28000417	4,000 K	60 pc(s).	0.142 kg

Specific technical data

Type ¹⁾	Photo-metric code	Typ. luminous flux at tp = 25 °C ²⁾	Typ. luminous flux at tp = 45 °C ³⁾	Typ. forward current	Min. forward voltage at tp = 45 °C	Max. forward voltage at tp = 25 °C	Typ. power consumption at tp = 45 °C ³⁾	Efficacy of the module at tp = 25 °C	Efficacy of the module at tp = 45 °C	Efficacy of the system at tp = 45 °C	Colour rendering index CRI
Operating mode HO at 325 mA											
STARK-QLE-G3-LENS-270-1250-830-CLA	830/359	1,150 lm	1,080 lm	325 mA	27 V	35 V	9.9 W	112 lm/W	109 lm/W	96 lm/W	> 80
STARK-QLE-G3-LENS-270-1250-840-CLA	840/359	1,210 lm	1,140 lm	325 mA	27 V	35 V	9.9 W	118 lm/W	115 lm/W	101 lm/W	> 80

¹⁾ Central measurement over the complete module.

²⁾ If mounted with M4 screws.

³⁾ Tolerance range for optical data: ±15 % and electrical data: ±10 %.

⁴⁾ HO ... high output..

1. Standards

IEC 62031
IEC 62471
IEC 61547
IEC 55015
IEC 61000-4-2

1.1 Photometric code

Key for photometric code, e. g. 830 / 449

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit		
Code	CRI	Colour temperature in Kelvin x 100	McAdam initial	McAdam after 25% of the life-time (max.6000h)	Luminous flux after 25% of the life-time (max.6000h)	
7	70 – 79	Kelvin x 100	initial	(max.6000h)	Code	Luminous flux
8	80 – 89				7	≥ 70 %
9	≥90				8	≥ 80 %
					9	≥ 90 %

1.2 Energy classification

Type	Forward current	Energy classification
QLE-G3-LENS-270-1250-830-CLA	325 mA	A++
QLE-G3-LENS-270-1250-840-CLA	325 mA	A++

2. Thermal details

2.1 tc point, ambient temperature and life-time

The temperature at tp reference point is crucial for the light output and life-time of a TALEX product.

For TALEX(module STARK QLE a tp temperature of 45 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and life-time.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-30 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 0 to 70 %.

2.3 Thermal design and heat sink

The rated life of TALEX products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the TALEX(module STARK QLE will be greatly reduced or the TALEX(module STARK QLE may be destroyed.

3. Installation / wiring

3.1 Electrical supply/choice of LED control gear

TALEX(module STARK QLE from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED control gear which complies with the relevant standards. The use of TALEXconverter from Tridonic in combination with TALEX(module STARK QLE guarantees the necessary protection for safe and reliable operation.

If a LED control gear other than Tridonic TALEXconverter is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



TALEX(module STARK QLE must be supplied by a constant current LED control gear. Operation with a constant voltage LED control gear will lead to an irreversible damage of the module.

Wrong polarity can damage the TALEX(module STARK QLE.

With parallel wiring tolerance-related differences in output are possible (thermal stress of the module) and can cause differences in brightness. If one module fails, the remaining modules may be overloaded.


TALEX(module STARK QLE can be operated either from SELV LED control gears or from LED control gears with LV output voltage.




TALEX(module STARK QLE are basic isolated up to 500 V against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the led control gear (also against earth) is above 500 V, an additional isolation between LED module and heat sink is required (for example by isolated thermal pads) or by a suitable luminaire construction.

At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

3.2 Wiring




Wiring examples

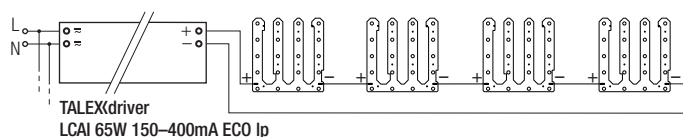

3.3 Wiring type and cross section

The wiring can be solid cable with a cross section of 0.2 to 0.75 mm². For the push-wire connection you have to strip the insulation (6–7 mm).



Inserting stranded wires / removing wires by lightly pressing on the push button.

3.4 Mounting instruction



None of the components of the TALEXmodule STARK QLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted with min. 6 screws per module. In order not to damage the modules only rounded head screws and an additional plastic flat washer should be used.



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate. Avoid corrosive atmosphere during usage and storage.

3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

4. Life-time

4.1 Life-time, lumen maintenance and failure rate

The light output of an LED Module decreases over the life-time, this is characterized with the L value.

L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the life-time of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value. In addition the percentage of failed modules (fatal failure) is characterized by the C value.


The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

4.2 Lumen maintenance for TALEXmodule STARK QLE


Forward current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
325 mA	55 °C	17,000 h	35,000 h	32,000 h	50,000 h	50,000 h	50,000 h

5. Electrical values

5.1 Typ. forward voltage vs. forward current

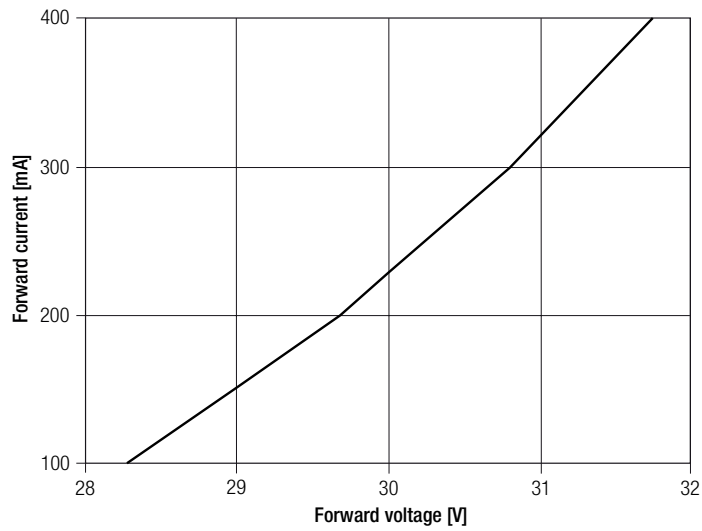

5.2 Forward voltage vs. tp temperature

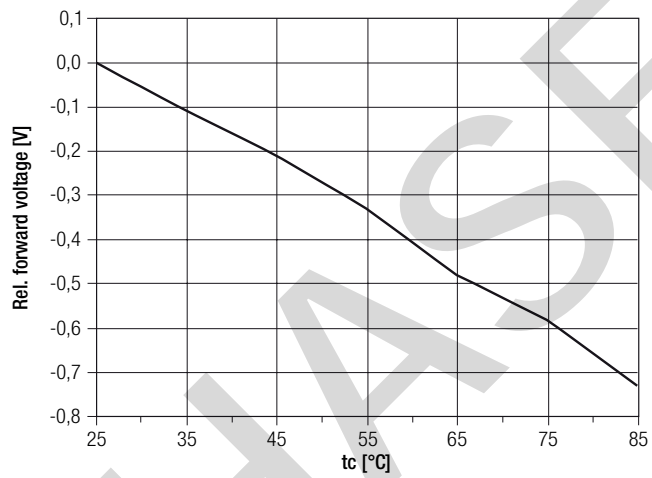

The diagrams are based on statistic values.
The real values can be different.

6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931


The specified colour coordinates are measured integral by a current impulse of 325 mA and a duration of 100 ms.

The ambient temperature of the measurement is $t_a = 25\text{ °C}$.

The measurement tolerance of the colour coordinates are ± 0.01 .

3,000 K


	x0	y0
Centre	0.4344	0.4032

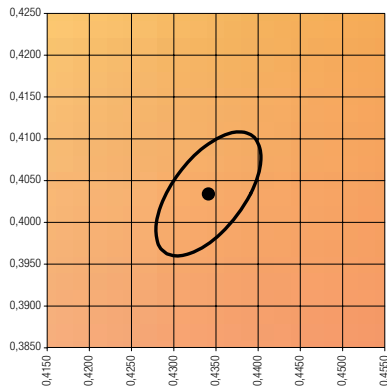



— MacAdam Ellipse: 3SDCM

4,000 K

	x0	y0
Centre	0.3828	0.3803

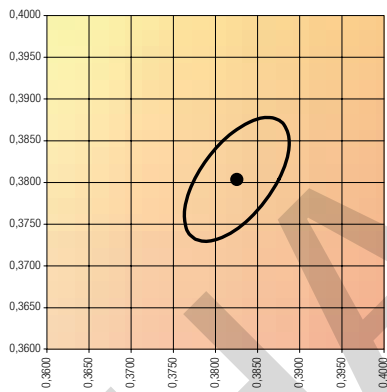


— MacAdam Ellipse: 3SDCM

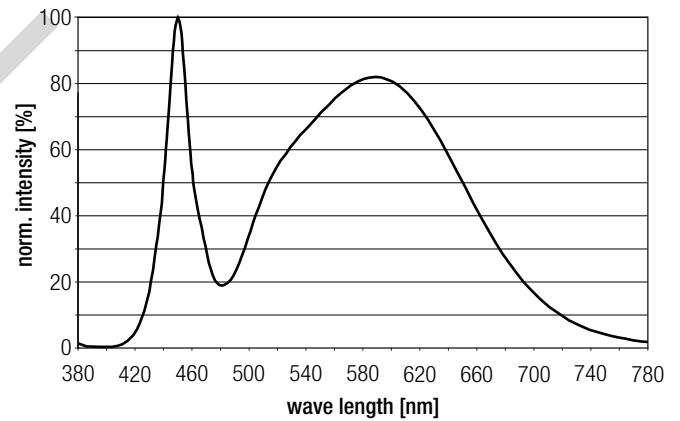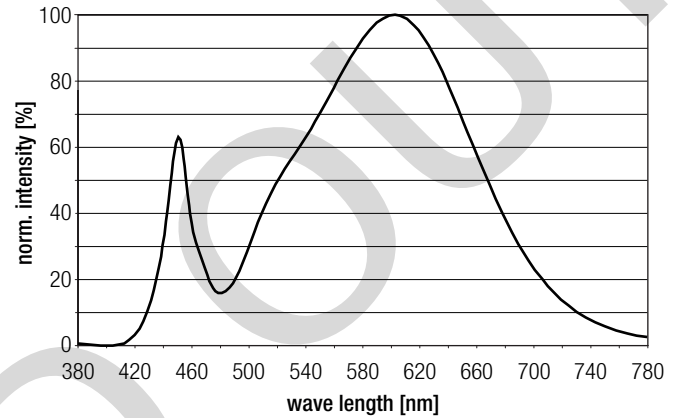

6.2 Light distribution

The optical design of the TALEX module STARK QLE product line ensures optimum homogeneity for the light distribution.

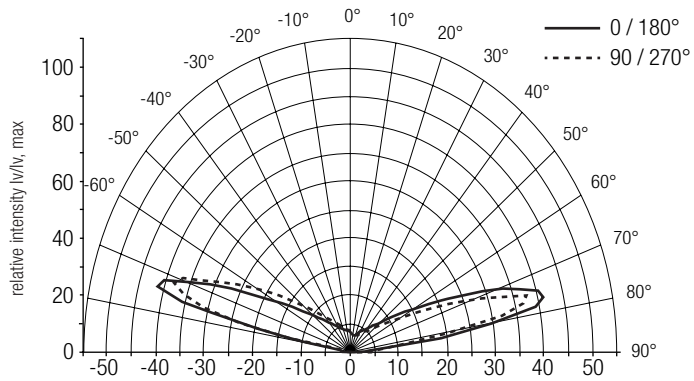


The colour temperature is measured over the complete module. The single LED light points can be outside of 3SDCM.

To ensure an ideal mixture of colours and a homogenous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 7 cm) should be used.

For further information see Design-in Guide, 3D data and photometric data on www.tridonic.com or on request.

6.3 Relative luminous flux vs. tc temperature

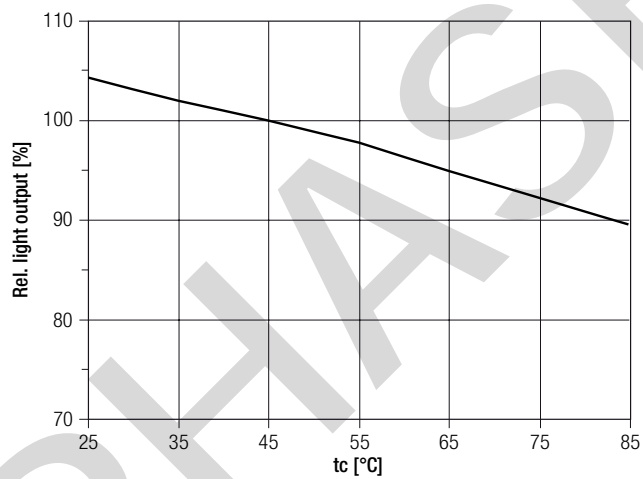

6.4 Relative luminous flux vs. operating current

