

pkg. wt. part no.
500 12 g 46.485.1116.50


Flat terminal block
5 pole
Contact opening function

Earth bracket
Snap in pins
Housing: PA, beige, PC, white
Marking: L N ⊕ DA+ DA-

- Upper terminal connection: 0.5 - 2.5 mm²
Direct insertion of solid wire ends and finely stranded wire ends by using the contact opening function
Contact opening function - also for release of already inserted wires
- Lower terminal connection:
0.5 - 2.5 mm² for solid wire ends
1.5 - 2.5 mm² for stranded wire ends
Wire release function by twist and pull
- Strip length: 9 ±1 mm
- Top Test openings
- Approvals: ÖVE Reg. Compliance with creepage distances and clearances (eg according to EN 60598) has to be ensured by the structural design of the luminaire.
- Sheet metal cutout is compatible to 46.415.1114.50

Minimum mounting distance

Metallfläche
Metal surface

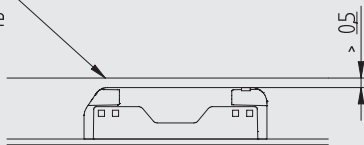

Compliance with creepage distances and clearances has to be ensured by the structural design of the luminaire.

| | | | | | | |
|------|---------------------------|---------------------------|--------------|--------------|------|-----|
| T 85 | | | | 250V 400V | 16 A | CAD |
| | 0.5 - 2.5 mm ² | 1.5 - 2.5 mm ² | 0.5 - 1.2 mm | | | |