

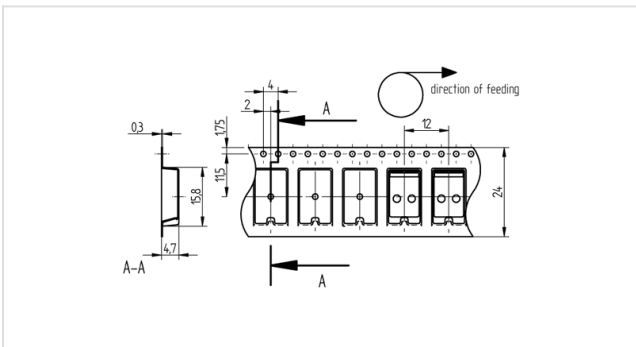


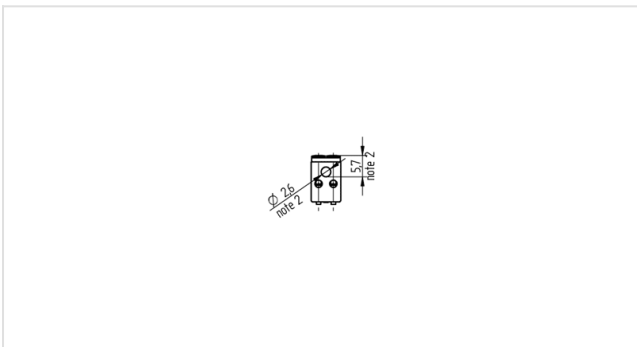

Technik für Licht
Komponenten · Optik · Automation

46.132.1001

SMD Terminal blocks
46.131/46.132: Mini-Flex with wire release function and accessories

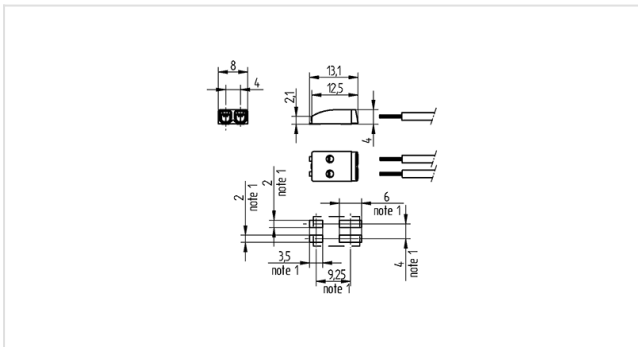

Part no.:

46.132.1001.50



8.0 + 1 mm



0.20-0.75 mm² AWG 24-18



0,2-0,5 mm²



0.20-0.75 mm² AWG 24-18

Description

- Also suitable for fine-stranded wires
- Note 1: Recommended dimensions for solder mask - Recommended thickness of solder 0.15 mm
- Note 2: Recommended Pick and Place area
- General note: It is recommended to make an electrical connection between both poles of each polarity on the solder mask
- It is recommended to use our wire release tool 46.131.U801.89 or 46.131.-398.50 by using fine-stranded wires
- Other packaging units on request

Stripped length:	8.0 + 1 mm
Product name:	SMD Terminal block Mini-Flex with wire release function 2 pole
Mounting method 1:	Solder fixing
Material:	Housing: PPA Contacts: Cu alloy
cULus file no.:	E-365006
cUR Rating:	9A / 320V
ENEC Rating:	9A / 320V
[URus Rating]:	9A / 320V
Weight:	0,4
Quantity of poles:	2
Approval:	IEC 60947-7-4, additional cURus
Pkg.:	15600